



Model: UEC100M/4
**4 Port, 100 Meter
 USB Extender**



Description


The UEC100M/4 is fully compliant with the USB 1.1 Specification, as certified by the USB Implementers Forum.

Features

- Supports USB 1.1 (low-speed, full-speed) devices at speeds up to 12 Mbps.
- Flexibility of locating the power adapter at either the Local Extender or Remote Extender.
- Provides support for both low-power and high-power USB devices.
- Ships with a USB cable, power adapter and User Guide.
- Power adapters are available for North American (110V) or International (110 - 240V) applications.
- Number of devices can be increased using standard USB hubs.

Highlights

The UEC100M/4 extends USB 1.1 connections up to 100 meters over Category 5 cable.

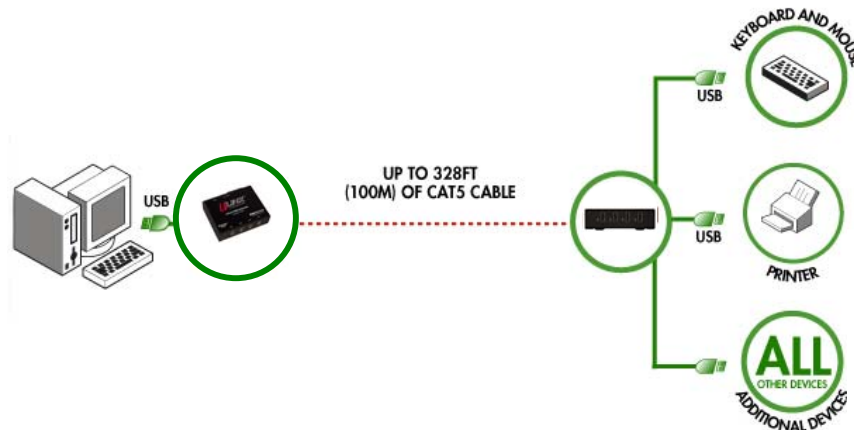

B&B electronics
 MANUFACTURING COMPANY

International Headquarters: 707 Dayton Road PO Box 1040 Ottawa, IL 61350 USA
 815-433-5100 Fax 433-5104 www.bb-elec.com orders@bb-elec.com support@bb-elec.com

European Headquarters: Westlink Commercial Park Oranmore Co. Galway Ireland
 +353 91 792444 Fax +353 91 792445 www.bb-europe.com orders@bb-europe.com support@bb-europe.com

Ordering Information

The UEC100M/4 is complete with a Local Extender and Remote Extender, a USB cable, power adapter and user guide.

Description: 4 Port, 100 meter USB Extender

Models: North America- UEC100M/4

Europe- UEC100M/4-EU

United Kingdom- UEC100M/4-UK

Product Specifications

Range (over Category 5 UTP cable)	100 meters (330 ft)
USB cable (included)	2 meters (6.6 ft)
Local connector (upstream)	1 USB Type B
Local connector (downstream)	1 RJ-45
Remote connector (upstream)	1 RJ-45
Remote connector (downstream)	4 USB Type A
Power adapter capacity	15V DC at 1A
Power available to USB at Remote unit	Local unit: 4 100mA (with power at Local unit) Remote unit: 4 500mA (with power at Remote unit)
Local dimensions	10.7 x 8.4 x 3.3 cm (4.2 x 3.3 x 1.3 in)
Local weight	0.3 kg (0.6 lb)
Remote dimensions	10.7 x 8.4 x 3.3 cm (4.2 x 3.3 x 1.3 in)
Remote weight	0.3 kg (0.6 lb)
Total system shipping weight	1.1 kg (2.4 lb)
Temperature range	4°C to 40°C
Regulatory testing	FCC, CE Class A



International Headquarters: 707 Dayton Road PO Box 1040 Ottawa, IL 61350 USA
815-433-5100 Fax 433-5104 www.bb-elec.com orders@bb-elec.com support@bb-elec.com

European Headquarters: Westlink Commercial Park Oranmore Co. Galway Ireland
+353 91 792444 Fax +353 91 792445 www.bb-europe.com orders@bb-europe.com support@bb-europe.com